
The pure beauty of natural wood



COLLECTION CONCEPT





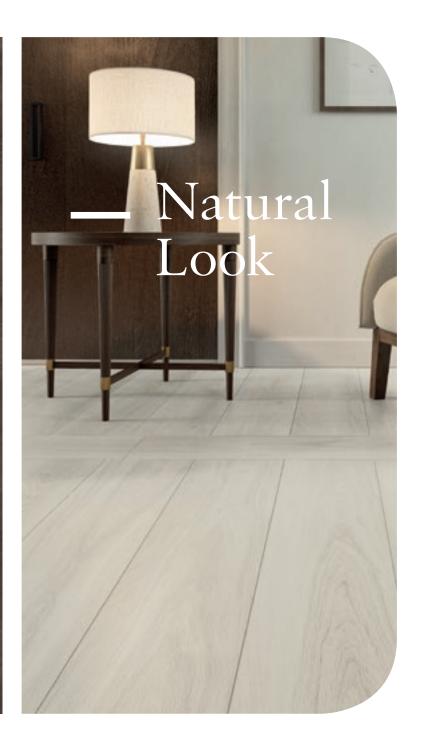

WHISPER The feeling and uncontaminated beauty of natural wood in its most pure and authentic interpretation.

O2 COLORS SIZES & FINISHES








8"×40"

planks are perfectly balanced for any use.

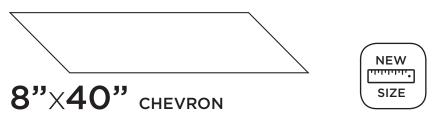

Chevron creates classically elegant surfaces.

Decor






Matte finish

The surface finish is pleasant to touch. A subtle texture, drawing inspiration from natural wood, increases the feeling of authenticity and realism.

Color options

The palette of **five natural colors** is extensive and offers the right solution for any style in both residential and commercial spaces.

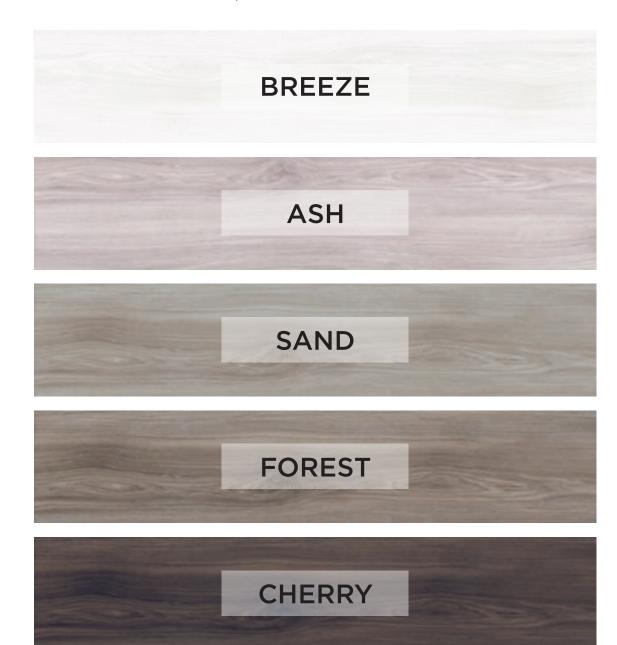

4

BREEZE



Floor _ 8"x40" BREEZE / Wall _ 2.5"x19" LISTELS MOSAIC FOREST





Floor _ 8"x40" BREEZE / Wall _ 2.5"x19" LISTELS MOSAIC FOREST



BREEZE

8"x40"

Whisper is a top quality product, which is the result of cutting-edge technology and exclusive know-how. Resistance to fire, water, and wear makes Caesar porcelain the best long-term decision for durability over time.

ASH





Floor _ 8"x40" ASH _ 8"x40" CHEVRON ASH / Wall _ 8"x40" BREEZE _ BRICKMIX PLACE RUST



Floor _ 8"x40" ASH _ 8"x40" CHEVRON ASH / Wall _ 8"x40" BREEZE _ BRICKMIX PLACE RUST



8"x40" ASH_8"x40" CHEVRON ASH

SAND



Floor _ 8"x40" SAND _ 18"x36" ORIGIN CANYON / Wall _ 8"x40" SAND _ 8"x40" CHERRY







8"x40"

The beauty of a material comes from meticulous design and care for details, the balance of the finished floor, the shades of color. This is Caesar's product culture.

FOREST



Floor _ 8"x40" FOREST / Wall _ 8"x40" SAND





8"x40" FOREST / Wall _ 8"x40" SAND



CHERRY







32



8"x40"

Whisper is suitable for floors and walls in both residential and commercial spaces. For outdoor environments, it is recommended as wall coverings.

FOREST







WHISPER














































TRIMS



2.5"x20" Bullnose

WHISPER






















SAND Rectified













FOREST









TRIMS




2.5"x20" Bullnose


WHISPER WHISPER

> **CHERRY** Rectified





8"x40" CHEVRON



TRIMS
























45


Low water absorption (<0,5%)

COLORED-BODY PORCELAIN TILES - RECTIFIED, ONE CALIBER

Colored-body porcelain stoneware tiles are produced minimizing the color difference between the glaze and the body. Nevertheless, the design is visible only on the surface.

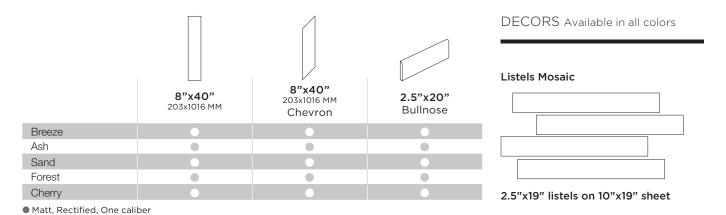

PACKAGING											
SIZE		BOX					PALLET				
INCHES	MM	PCS	SURFACE (SQF)	SURFACE (SQM)	WEIGTH (LBS)	WEIGTH (KG)	BOXES	SURFACE (SQF)	SURFACE (SQM)	WEIGTH (LBS)	WEIGTH (KG)
8"x40"	203x1016	6	12.92	1.2	~56.88	~25.8	36	465	43.2	~2047.63	~928.8
8"x40" Chevron	203x1016	6	10.33	0.96	~43.39	~19.68	30	310	28.8	~1301.60	~590.4
Listels Decor (2.5"x19" listels	Listels decor (63,5x483 listels	2 sheets	2.58	0.24	~10.58	~4.8	54	139.5	12.96	~571.43	~259.2

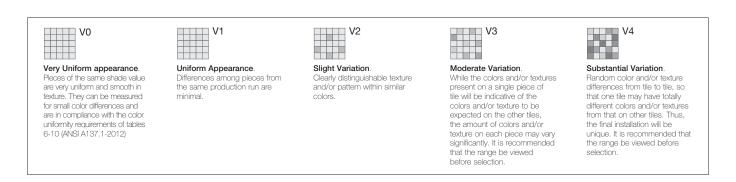

For information about installation and cleaning of Caesar products, please consult our general catalogue or the website www.caesarceramicsusa.com.

Color reproductions may vary from actual products.

Caesar reserves the right to modify the products illustrated in this catalogue for reasons of production or to improve quality. Samples are purely indicative. Packaging and weights may vary for production reasons. Contact our sales department when ordering.

In case of running pattern installation, Caesar recommends a maximum 33% offset.

Caesar warrants that our products meet or exceed the requirements of ANSI, specification ANSI A137.1: 2012, as shown in our Tile Performance Data sheets.





CLEANING PROCEDURES



CUTTING-EDGE TECHNOLOGY

Cutting-edge technology: the best quality and aesthetic performance.



CAPTURING NATURE'S VARIETY IN HARMONY

The tiles have a particularly diverse appearance. Installed surfaces boast a natural and attractive variability.



INSPIRED BY TOP QUALITY WOOD

Whisper captures and reproduces the appearance of authentic wood in the best manner possible while eliminating defects and imperfections.



WEAR RESISTANT EASY CLEANING

Top quality porcelain stoneware has excellent resistance to wear and scratching, stain-proof, easy to clean and perfectly sanitizable.



CLEAR NATURAL DETAILS

The presence of details and distinctive features of wood give the installed floor a great feeling of authenticity.



WOOD AND STONE EFFECT

Whisper has an elegant and subtle look and can be matched with other surfaces, materials and colors with the utmost ease.

- After 36/48 hours, when both the floor and the grouts have completed their first drying phase and before the real phase of the floor has yet to begin, it is necessary to proceed with the cleaning of the tiled surface using a "padding" action acid detergent, diluted according to the manufacturer's instructions.
- For areas heavily stained with grout, it is necessary to repeat this operation once or twice, increasing the percentage of water.
- The excess grout residue must be removed so that it does not dry and stick on the surface. It is necessary to change the cleaning water frequently and rinse well.
- Care must be taken on inlayed, polished and anti-slip products; for the latter in particular, the use of a floorwashing machine combined with the action of an acid detergent helps reach the spaces between adjacent tiles and clean them properly.
- If such a cleaning procedure is not carried out, or if such cleaning is carried out too late, the grout residue creates an extremely absorbent film, which holds dirt, making the surface difficult to clean: in this case, Ceramiche CAESAR S.p.A. will not be liable for any damage caused to the surface.
- We would like to remind you that porcelain stoneware is a product with excellent technical features which allow for high grade of mechanical wear and resistance to acids (except for hydrofluoric acid and its derivatives) and alkalis, features which are added to a high aesthetic quality.
- Ordinary maintenance must be carried out using specialist detergents to remove stains but these detergents must not leave a wax, film or membrane residue.
- Rinsing well with plenty of clean water is a fundamental part of the cleaning procedure, therefore we advise against the use of products which state that they "do not need rinsing".
- For more detailed and updated information, please consult the website www.caesarceramicsusa.com, or contact our sales department.

46



SUSTAINABLE MIND





From our plant

The **brand new production facilities** in the USA are built in compliance with the most stringent standards in term of environmental protection, safety of workers and reduction of energy consumption.

to your project.

By choosing Caesar Ceramics USA, the end user will be sure to purchase **durable**, **safe and green floor and wall tiles**: being extremely durable, they do not call for any chemical treatment, varnish or special detergent. They do not release dust or other substances, even when subject to high pedestrian traffic.





The Health Product Declaration (HPD) Open Standard provides for the disclosure of product contents and potential associated human and environmental health hazards.

By means of its declaration, Caesar USA adheres to the standard.



Caesar Ceramics USA is a member of US Green Building Council (USGBC).

The LEED program, promoted by the USGBC, is the most widely used green building rating system in the world. Available for virtually all building, community and home project types, LEED provides a framework to create healthy, highly efficient and cost-saving green buildings.

48



TILE PERFORMANCE DATA

COLORED-BODY PORCELAIN TILES - RECTIFIED

Classification in accordance with ANSI A137.1: 2012 (P1 class).

	TECHNICAL FEATURE	ASTM	VALUE REQUIRED ANSI A 137.1-2012	CAESAR AVERAGE VALUE		
	Facial dimension	ASTM C-499	± 0,25% or ± 0,03 in	In accordance to ANSI A 137.1-2012		
1 1	Wedging	ASTM C-502	± 0,25% or ± 0,03 in			
R. A.	Warpage diagonal	ASTM C-485	± 0,4% or ± 0,07 in			
₩ ₩	Warpage edge	ASTM C-485	± 0,4% or ± 0,05 in			
+	Thickness	ASTM C-499	RANGE: 0,040 inch max (1 mm)	In accordance to ANSI A 137.1-2012		
	Water absorption	ASTM C-373	≤ 0,5%	Passed "impervious tiles" Class P1		
*	Breaking strength	ASTM C-648	≥ 250 lbs (≥1113 N)	≥400 lbs		
	Freeze thaw	ASTM C-1026	No damages	In accordance		
	Chemical resistance	ASTM C-650	As reported	Unaffected		
	MOHS hardness			6		
	Dynamic Coefficient of Friction*		0,42	In accordance		



Average values referred to the last two years of production and related to the matte finish of the product.

Values relate to the matte finish of the product and to tests carried out by certified external laboratories, whose results are available upon request.

Be sure to use the same caliber tiles. Color reproductions may vary from actual products.

* Due to the intrinsic nature of porcelain stoneware tiles, please note that the coefficient of friction may vary within the same production lot or from one production lot to the other. Caesar products can become slippery when wet. We recommend to always keep the surface dry.

WHISPER

PORCELAIN TILE



CAESAR CERAMICS USA INC. 500 Wilson Pike Cir, Ste 127 Brentwood TN 37027-3261 Phone: +1 (732) 389 5757 fax: +1 (732) 389 8589

caesarceramicsusa.com

